

### Hydraulic cylinders for wheel loaders


- Steering
- Lift
- Tilt




Please scan with your mobile device for further information.




Steering

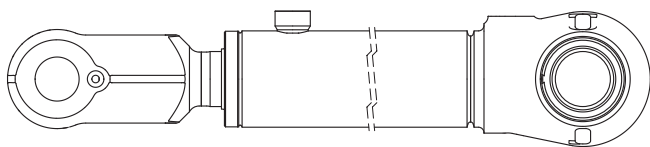

Lift



Tilt

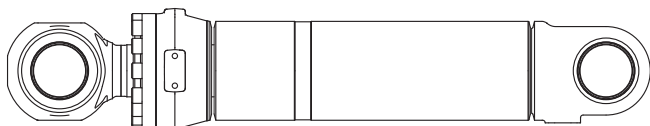

**Pacoma standard parameters**

- Closed length: up to 3000 mm
- Stroke: up to 2500 mm
- Piston diameter: up to 260 mm
- Piston rod diameter: up to 120 mm
- Operating pressure: up to 360 bar
- Temperature range: -25°C to 80°C
- Durability: > 2.000.000 cycles
- Cushioning: application-optimized cushioning characteristic (rod and bottom side)
- Seal system: protected against dieseling, low friction, no stick-slip-effect
- Bearings: hardened steel or bronze bearings
- Maintenance: easy and quick by form-fit piston fixation (low torque) – LIRE
- Installation: fix points, oil ports, grease nipples according to customer request
- Paint: high solid coating in any RAL color and levels
- Special Features: stroke measurement systems, integrated valves, external fluid lines, brackets

Other parameters are available on demand.

**Europa/Deutschland**

Pacoma GmbH  
 Königsberger Straße 12  
 D-37269 Eschwege  
 info@pacoma.com  
 www.pacoma.com

**China/Fenghua**

Pacoma China  
 Hydraulic Equipments Co., Ltd  
 No. 18 Xiaowangmiao Section Jiang Ba Line  
 Fenghua, Zhejiang Zip Code 315500  
 info.cn@pacoma.com

